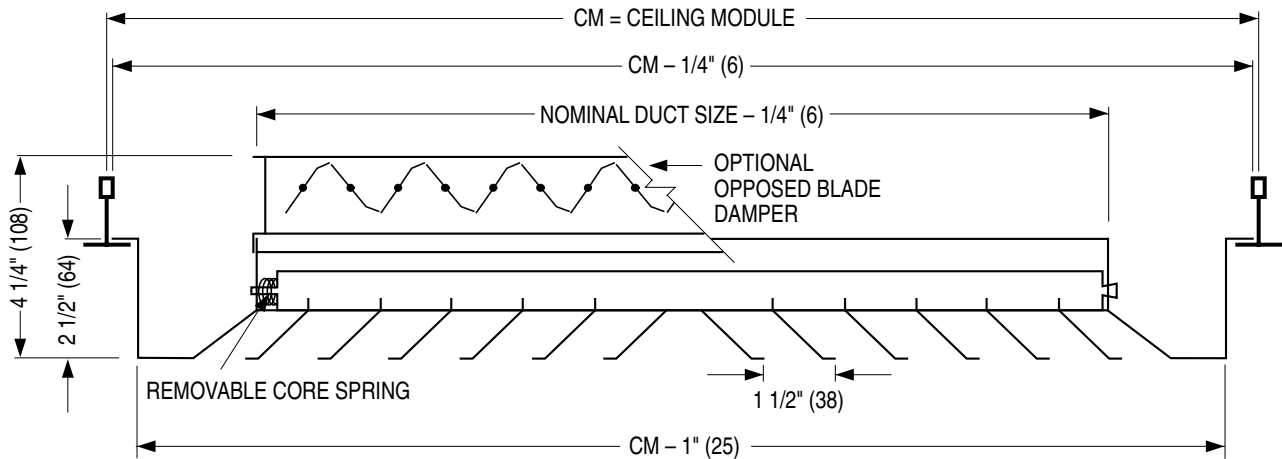
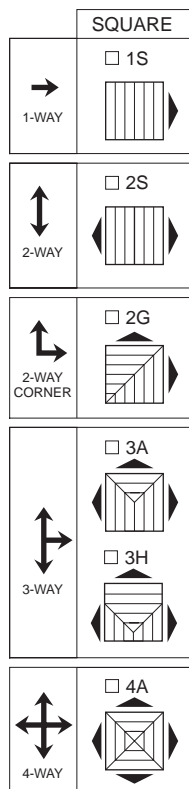


**TYPE DL DROPPED FACE LAY-IN T-BAR MOUNT**

**CORE STYLE SELECTION**


Patterns are shown in plan view (looking down into inlet).

**AVAILABLE SIZES:**

IMPERIAL MODULES				METRIC MODULES	
Imperial Units (in.)		Metric Units (mm)		Metric Units (mm)	
CM	Maximum Duct Size	CM	Maximum Duct Size	CM	Maximum Duct Size
24 x 24	18 x 18	610 x 610	457 x 457	600 x 600	457 x 457
48 x 48	42 x 42	1219 x 1219	1067 x 1067	1200 x 1200	1067 x 1067

Minimum duct (neck) size: 6" x 6" (152 x 152).

Maximum duct (neck) size: see table.

Available in 3" (76) increments only.

**DESCRIPTION:**

1. Material: Corrosion-resistant steel.
2. Model 6500 is a high capacity louvered ceiling diffuser available in 1, 2, 3 or 4-way blow patterns to provide a tight horizontal airflow pattern from maximum to minimum airflow. Ideal for VAV applications. The Type DL dropped face outer frame has been designed especially for exposed grid T-Bar ceiling systems. It provides an architecturally pleasing appearance and reduces ceiling smudging.
3. Spring-loaded removable core.
4. Standard finish is AW Appliance White baked enamel.

**ACCESSORIES (OPTIONAL):**
**SQUARE AND RECTANGULAR NECK**
 Steel opposed blade damper. Model 6500-O.

**ROUND NECK**
 SQR Square to round transition collar

 SQR-O Square to round transition collar for use over O.B.D.

 4275 Radial Opposed Blade Damper (round)

 4250 Radial Sliding Blade Damper (round)

**OPTIONAL FINISH:**
 SP Special. Specify \_\_\_\_\_ .

**SCHEDULE TYPE:**
**PROJECT:**
**ENGINEER:**
**CONTRACTOR:**

Dimensions are in inches (mm).

**DATE**
**B SERIES**
**SUPERSEDES**
**DRAWING NO.**

4 - 24 - 03

6500

22 - 6 - 01R

6500-2A