



EXTRUDED ALUMINUM STATIONARY LOUVER
4" (102) DEEP • J BLADE • DRAINABLE HEAD
MODEL: 1604JD (1604SB)

Model 1604JD, incorporating J style blades, is an architecturally styled 4" (102) deep louver designed with smooth, clean lines that visually compliment any structure's exterior styling. Available in channel or flanged type, the 4" (102) deep frame installs easily in most common wall configurations. The drainable head feature utilizes a top gutter that collects the water running down the building face and channels it out the concealed downspouts in the side frame, thus preventing it from flowing down into the airstream. Suitable for use in exhaust and low to medium velocity intake applications, the blade design features a rear water baffle and provides good protection against general weather conditions, with low pressure drop characteristics and a high free area. Reinforcing bosses run the full length of each blade for superior strength. Model 1604JD is AMCA Licensed and is engineered to be architecturally appealing as well as mechanically enduring.

STANDARD CONSTRUCTION:

- FRAME:** 4" (102) deep, Type 6063-T5 extruded aluminum, .080" (2.03) nominal wall thickness. Integral caulking slot provided.
- BLADES:** Type 6063-T5 extruded aluminum, .080" (2.03) nominal wall thickness, with reinforcing bosses. J style.
- BLADE ANGLE:** Fixed at 37 degrees.
- BLADE SPACING:** Approx. 4" (102) on centers.
- BLADE SUPPORT BRACKETS:** Concealed type, factory installed on rear of louver on maximum 48" (1219) centers. Reinforced with 1" x 1" (25 x 25) angle (adds approx. 1" [25] to overall louver depth).
- MULLIONS:** Concealed type allowing continuous line appearance up to 120" (3048) wide. Larger assemblies require separate visible frames with downspouts.
- SCREEN:** 3/4" x .051 (19 x 1.3) expanded, flattened aluminum bird screen in removable frame, inside (rear) mount (adds approximately 3/8" [10] to louver depth).
- FINISH:** Mill.
- MINIMUM SIZE:** 12" W x 12" H (305 x 305).
- MAX. SINGLE SECTION SIZE:** 120" W x 84" H (3048 x 2134) or 84" W x 120" H (2134 x 3048). 70 sq. ft. (6.5m²). Larger louvers will require field assembly of smaller sections.

OPTIONS:

- FL** Flanged Frame.
- BSSS** Type 304 S.S. Bird Screen.
- BSN** No Bird Screen.
- ISA** Aluminum Insect Screen.
- ISSS** Type 304 S.S. Insect Screen.
- WE** Welded Construction.
- ESI** Extended Sill.
- FR1** 1" (25) Filter Rack.
- FR2** 2" (51) Filter Rack.
- PAC** Perimeter Anchor Clips.
- Other:** _____

OPTIONAL FINISHES:




- PC3** Powder Coat AAMA 2603. Color: _____
- PC4** High Performance Powder Coat AAMA 2604 (Equivalent to 50% Kynar®). Color: _____
- PC5** Fluoropolymer Powder Coat AAMA 2605 (Equivalent to 70% Kynar®). Color: _____
- PCC** Prime Coat.
- AN04** Clear Anodized 204-R1.
- AN15** Clear Anodized 215-R1.

Color Anodized:

- ANLB** Light Bronze.
- ANDB** Dark Bronze.
- ANMB** Medium Bronze.
- ANBK** Black.

OPTIONAL W x H SIZING (1/4" [6.5] Undersize standard):

- U00** Exact Size.
- U38** Undersize 3/8" (9.5).
- U50** Undersize 1/2" (12.7).

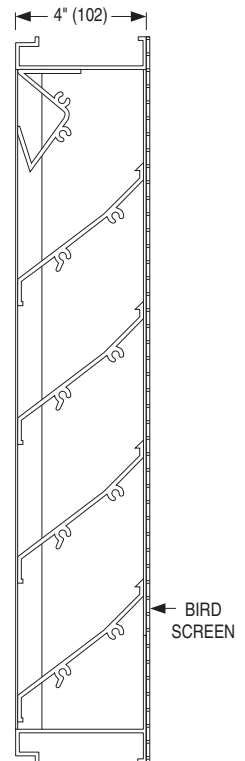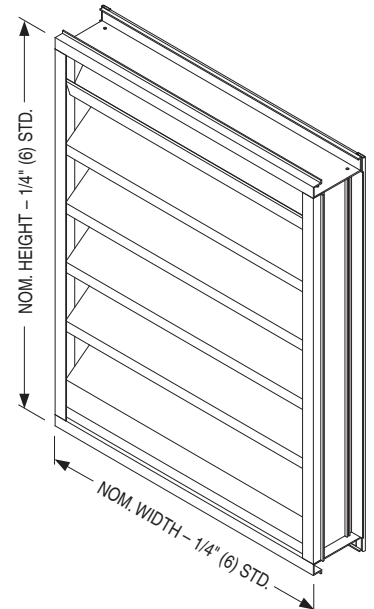

FLANGED FRAME (FL)
(OPTIONAL)

SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 1 of 3
 Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 2 - 11	1600	1604SB-1 9-22-03R	1604JD



**EXTRUDED ALUMINUM STATIONARY LOUVER
4" (102) DEEP • J BLADE • DRAINABLE HEAD
PERFORMANCE DATA
MODEL: 1604JD (1604SB)**

FREE AREA in Square Feet and Square Meters

		Width in Inches and Meters																		
		12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
Height in Inches and Meters	12	0.25	0.39	0.54	0.69	0.84	0.99	1.14	1.29	1.44	1.59	1.74	1.89	2.04	2.19	2.34	2.49	2.64	2.79	2.94
	.30	0.02	0.03	0.05	0.06	0.07	0.09	0.10	0.12	0.13	0.14	0.16	0.17	0.19	0.20	0.21	0.22	0.25	0.26	0.27
	18	0.52	0.83	1.14	1.46	1.77	2.09	2.40	2.71	3.03	3.34	3.65	3.97	4.28	4.59	4.91	5.22	5.53	5.85	6.16
	.46	0.05	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.28	0.31	0.34	0.36	0.39	0.42	0.45	0.49	0.51	0.54	0.57
	24	0.80	1.28	1.77	2.25	2.73	3.22	3.70	4.19	4.67	5.15	5.64	6.12	6.60	7.09	7.57	8.05	8.54	9.02	9.50
	.61	0.07	0.12	0.16	0.21	0.25	0.29	0.34	0.38	0.43	0.47	0.52	0.56	0.61	0.65	0.70	0.75	0.79	0.84	0.88
	30	1.04	1.67	2.30	2.93	3.56	4.19	4.82	5.45	6.08	6.71	7.34	7.97	8.60	9.23	9.86	10.49	11.12	11.75	12.38
	.76	0.09	0.15	0.21	0.27	0.33	0.39	0.44	0.50	0.56	0.62	0.68	0.74	0.79	0.85	0.91	0.98	1.03	1.09	1.15
	36	1.33	2.13	2.93	3.73	4.53	5.33	6.13	6.93	7.73	8.53	9.33	10.13	10.93	11.73	12.53	13.33	14.13	14.93	15.73
	.91	0.12	0.19	0.27	0.34	0.42	0.49	0.57	0.64	0.71	0.79	0.86	0.94	1.01	1.09	1.16	1.24	1.31	1.39	1.46
	42	1.58	2.52	3.47	4.42	5.37	6.32	7.27	8.22	9.16	10.11	11.06	12.01	12.96	13.91	14.86	15.81	16.76	17.71	18.66
	1.07	0.14	0.23	0.32	0.41	0.49	0.58	0.67	0.76	0.85	0.94	1.02	1.11	1.20	1.29	1.38	1.47	1.56	1.65	1.73
	48	1.85	2.97	4.09	5.20	6.32	7.43	8.57	9.66	10.78	11.89	13.01	14.12	15.24	16.35	17.47	18.58	19.70	20.81	21.93
	1.22	0.17	0.27	0.38	0.48	0.58	0.69	0.80	0.89	1.00	1.10	1.20	1.31	1.41	1.52	1.62	1.73	1.83	1.93	2.04
	54	2.11	3.38	4.64	5.91	7.18	8.44	9.71	10.98	12.25	13.51	14.78	16.05	17.32	18.58	19.85	21.12	22.38	23.64	24.91
	1.37	0.19	0.31	0.43	0.54	0.66	0.78	0.90	1.02	1.13	1.25	1.37	1.49	1.60	1.72	1.84	1.96	2.08	2.20	2.32
	60	2.38	3.81	5.25	6.68	8.11	9.54	10.97	12.41	13.84	15.27	16.70	18.13	19.57	21.00	22.43	23.86	25.29	26.73	28.16
	1.52	0.22	0.35	0.48	0.62	0.75	0.88	1.02	1.15	1.28	1.41	1.55	1.68	1.81	1.95	2.08	2.22	2.35	2.48	2.62
	66	2.67	4.27	5.87	7.47	9.08	10.68	12.28	13.88	15.48	17.09	18.69	20.29	21.89	23.50	25.10	26.70	28.30	29.91	31.51
	1.68	0.24	0.39	0.54	0.69	0.84	0.99	1.14	1.29	1.43	1.58	1.73	1.88	2.03	2.18	2.33	2.48	2.63	2.78	2.93
72	2.91	4.66	6.41	8.16	9.91	11.66	13.41	15.16	16.91	18.66	20.40	22.15	23.90	25.65	27.40	29.14	30.89	32.64	34.39	
1.83	0.27	0.43	0.59	0.75	0.92	1.08	1.24	1.40	1.57	1.73	1.89	2.05	2.22	2.38	2.54	2.71	2.87	3.03	3.20	
78	3.19	5.11	7.03	8.94	10.86	12.78	14.70	16.62	18.53	20.45	22.37	24.29	26.20	28.12	30.04	31.96	33.87	35.79	37.71	
1.98	0.29	0.47	0.65	0.83	1.01	1.18	1.36	1.54	1.72	1.90	2.07	2.25	2.43	2.61	2.79	2.97	3.15	3.33	3.50	
84	3.45	5.52	7.59	9.65	11.72	13.79	15.86	17.93	20.00	22.07	24.14	26.21	28.28	30.35	32.42	34.49	36.56	38.63	40.70	
2.13	0.32	0.51	0.70	0.89	1.09	1.28	1.47	1.66	1.85	2.05	2.24	2.43	2.62	2.82	3.01	3.21	3.40	3.59	3.78	
90	3.72	5.95	8.19	10.42	12.66	14.89	17.13	19.36	21.60	23.83	26.06	28.30	30.53	32.77	35.00	37.24	39.47	41.71	43.94	
2.29	0.34	0.55	0.76	0.96	1.17	1.38	1.59	1.79	2.00	2.21	2.42	2.62	2.83	3.04	3.25	3.46	3.67	3.88	4.08	
96	4.00	6.41	8.81	11.22	13.62	16.03	18.43	20.84	23.24	25.65	28.05	30.46	32.86	35.27	37.67	40.07	42.48	44.88	47.28	
2.44	0.37	0.59	0.81	1.04	1.26	1.48	1.71	1.93	2.16	2.38	2.60	2.83	3.05	3.27	3.50	3.72	3.95	4.16	4.39	
102	4.30	6.88	9.46	12.04	14.61	17.19	19.77	22.35	24.93	27.51	30.09	32.67	35.25	37.82	40.40	42.98	45.56	48.14	50.72	
2.59	0.40	0.64	0.88	1.12	1.36	1.60	1.84	2.08	2.32	2.56	2.80	3.03	3.27	3.51	3.75	3.99	4.23	4.47	4.71	
108	4.54	7.26	9.98	12.71	15.43	18.15	20.88	23.60	26.32	29.04	31.77	34.49	37.21	39.94	42.66	45.38	48.10	50.83	53.55	
2.74	0.42	0.67	0.93	1.18	1.43	1.69	1.94	2.19	2.45	2.70	2.95	3.20	3.46	3.71	3.96	4.22	4.47	4.72	4.97	
114	4.82	7.72	10.61	13.51	16.40	19.30	22.19	25.09	27.98	30.88	33.77	36.67	39.56	42.46	45.35	48.24	51.14	54.03	56.93	
2.90	0.45	0.72	0.99	1.25	1.52	1.79	2.06	2.33	2.60	2.87	3.14	3.41	3.68	3.94	4.21	4.48	4.75	5.02	5.29	
120	5.06	8.10	11.14	14.18	17.21	20.25	23.29	26.33	29.37	32.40	35.44	38.48	41.52	44.55	47.59	50.63	53.67	56.71	59.74	
3.05	0.47	0.75	1.03	1.32	1.60	1.88	2.16	2.45	2.73	3.01	3.29	3.57	3.86	4.14	4.42	4.70	4.99	5.27	5.55	



SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 3
Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

2 - 2 - 11

1600

1604SB-2
9-22-03R

1604JD



EXTRUDED ALUMINUM STATIONARY LOUVER
4" (102) DEEP • J BLADE • DRAINABLE HEAD
PERFORMANCE DATA
MODEL: 1604JD (1604SB)

AIRFLOW/WATER PENETRATION DATA
for 48" x 48" (1219 x 1219) Louver Size


Free Area %	54%
Free Area sq. ft. (sq. m.)	8.57 (0.80)
Free Area Velocity at Point of Beginning Water Penetration at .01 oz./sq. ft. (3 ml/sq. m) (15 min. test duration)	961 fpm (293 m/min.)
Air Volume at 961 fpm	8236 cfm (3887 l/s)
Free Area Velocity	
Pressure Drop @ 961 fpm	.16 in. w.g. (40 Pa)

NOTE: To minimize water penetration when sizing intake louvers, select a Free Area Velocity that is **below** the point of beginning water penetration.



Nailor Industries Inc. certifies the Model 1604JD shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. Seal applies to air performance ratings and water penetration ratings.

PRESSURE DROP

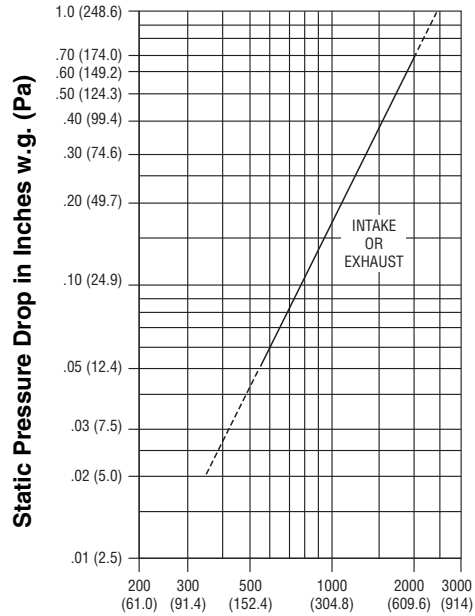

Air Velocity in Feet (Meters) Per Minute Through Free Area
 Louver test size: 48" x 48" (1219 x 1219 mm). Standard air density @ 0.075 lbs/ft³.

SCHEDULE TYPE:	Page 3 of 3			
PROJECT:	Dimensions are in inches (mm).			
ENGINEER:	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR:	2 - 2 - 11	1600	1604SB-2 9-22-03R	1604JD