



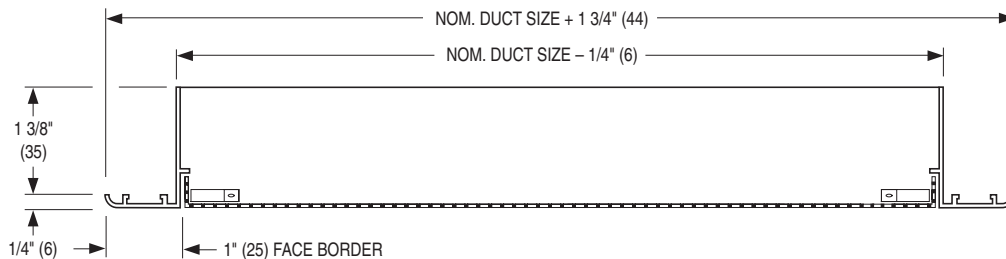

**PERFORATED CEILING DIFFUSER**  
 RETURN • REMOVABLE FACE  
 SURFACE MOUNT • SQUARE NECK  
**MODELS: 4340R AND 4340RA**

TYPE S Surface Mount

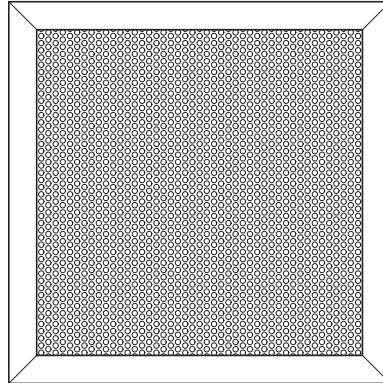

**DESCRIPTION:**

1. Material: Corrosion-resistant steel perforated face. Extruded aluminum frame.
2. Designed to match supply air models 4340CB and 4340M in appearance, except that the air pattern controllers are omitted. Suitable for ducted or ductless return air applications. Diffuser frame is mechanically interlocked for strength with hairline mitered corners.
3. Minimum size 6" x 6" (152 x 152). Maximum size 24" x 24" (610 x 610).
4. Removable face has concealed latches for easy access to optional damper and cleaning.
5. Perforated face has 3/16" (5) diameter holes on 1/4" (6) staggered centers (51% free area).
6. Type N standard fastening is with sheet metal screws (by others), through the neck of the diffuser outer frame.
7. Standard finish is AW Appliance White.

**OPTIONS:**

- Aluminum perforated face (Model 4340RA).
- Finish:**
- SP Special \_\_\_\_\_.
- Fastening:**
- Type A Countersunk screwholes on face of outer frame.

<b>SCHEDULE TYPE:</b>		Dimensions are in inches (mm).			
<b>PROJECT:</b>					
<b>ENGINEER:</b>	<b>DATE</b>	<b>B SERIES</b>	<b>SUPERSEDES</b>	<b>DRAWING NO.</b>	
<b>CONTRACTOR:</b>	6 - 30 - 03	4300	3 - 24 - 03	4340R	