




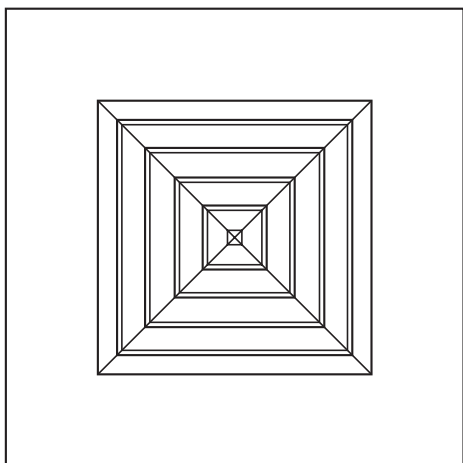

**PATTERN CEILING DIFFUSER**  
**STEEL LOUVERED FACE • FIBERGLASS**  
**PLENUM • 24" x 24" MODULE FOR T-BAR CEILINGS**  
**MODEL: 6500FP TYPE L**

**TYPE L LAY-IN T-BAR**

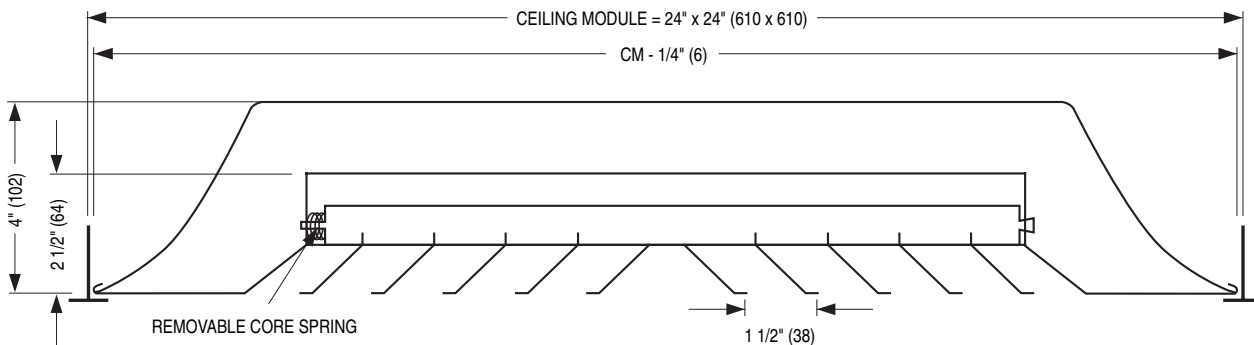

**DESCRIPTION:**

1. Corrosion-resistant steel diffuser face and core assembly. One piece molded fiberglass backpan with foil back vapour barrier. 6.0 R-value.
2. Model 6500FP is a high capacity ceiling diffuser with a 4-way blow pattern that provides a tight horizontal airflow pattern from maximum to minimum airflow. Ideal for VAV applications.
3. Spring-loaded 15" x 15" (381 x 381) removable core.
4. Pre-scored plenum for 6", 8", 10", 12", 14" or 15" (152, 203, 254, 305, 356 or 381) dia. spin-in or tab lock inlet collar (by others).
5. Standard finish is AW Appliance White.

**ACCESSORIES (OPTIONAL):**

- 4275 Radial Opposed Blade Damper.
  - 4250 Radial Sliding Blade Damper.
- Finish
- SP Special. Specify \_\_\_\_\_ .

<b>SCHEDULE TYPE:</b>	
<b>PROJECT:</b>	
<b>ENGINEER:</b>	
<b>CONTRACTOR:</b>	

Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
3 - 12 - 10	6500FP	NEW	6500FP-1