




**MODULAR CORE CEILING DIFFUSER**  
 1, 2, 3 OR 4-WAY ADJUSTABLE DISCHARGE  
 PATTERN • SQUARE NECK • ALUMINUM  
 MODELS: 7200 AND 7200-O TYPE TL

**TYPE TL TEGULAR LAY-IN T-BAR**

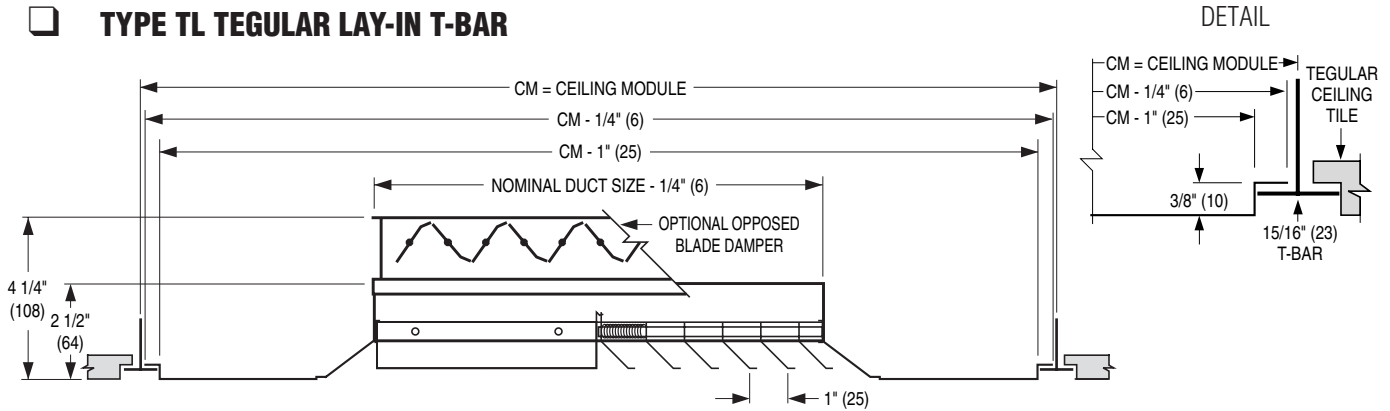

Ceiling Module CM			Available Duct Sizes
Imperial Modules		Metric Modules	
Imperial Units (inches)	SI Units (mm)	SI Units (mm)	
12 x 12	305 x 305	300 x 300	6 x 6 (152 x 152)
24 x 12	610 x 305	600 x 300	6 x 6 (152 x 152) 9 x 9 (229 x 229) 12 x 12 (305 x 305) 15 x 15 (381 x 381)
20 x 20	508 x 508	500 x 500	8 x 8 (203 x 203) 10 x 10 (254 x 254) 14 x 14 (356 x 356)
24 x 24	610 x 610	600 x 600	6 x 6 (152 x 152) 10 x 10 (254 x 254) 15 x 15 (381 x 381)
			8 x 8 (203 x 203) 12 x 12 (305 x 305) 16 x 16 (406 x 406)
			9 x 9 (229 x 229) 14 x 14 (356 x 356) 18 x 18 (457 x 457)

**DESCRIPTION:**


1. Material: Aluminum. Extended panel is corrosion-resistant steel.
2. Model 7200 is a versatile ceiling diffuser. It consists of four spring loaded modular cores that may be simply adjusted by rotating each module after installation to provide a 1, 2, 3 or 4-way blow pattern. A tight horizontal air pattern from maximum to minimum flow makes it ideal for VAV applications.
3. Standard finish is AW Appliance White.

**OPTIONS:**

- PLA Aluminum Extended Panel
- SQUARE NECK**
- Steel opposed blade damper - Model 7200-O
  - Aluminum opposed blade damper - Model 7200-OA
- ROUND NECK**
- SQR Square to round transition collar
  - SQR-O Square to round transition collar for use over opposed blade damper.
- \_\_\_\_\_ round neck size (inches)
- 4275 Radial damper
  - 4250 Radial sliding blade damper
  - 4675 Butterfly damper
- OPTIONAL FINISH:**
- SP Special. Specify \_\_\_\_\_.

**MODULAR CORE ADJUSTMENTS**

(The Model 7200 is shipped with the core set for 4-way discharge).

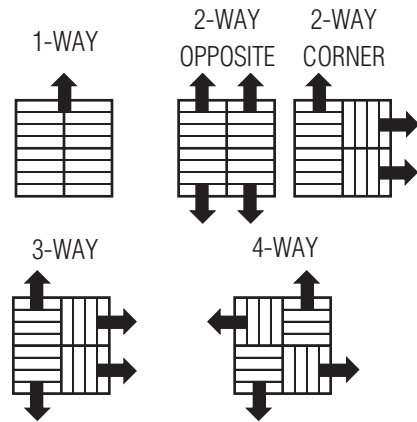

**SCHEDULE TYPE:** \_\_\_\_\_

**PROJECT:** \_\_\_\_\_

**ENGINEER:** \_\_\_\_\_

**CONTRACTOR:** \_\_\_\_\_

Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
7 - 1 - 09	7200	NEW	7200-3C