




**SINGLE DUCT TERMINAL UNIT WITH
HOT WATER REHEAT
PNEUMATIC CONTROLS • PRESSURE INDEPENDENT
VARIABLE OR CONSTANT VOLUME
MODEL: P30RW**

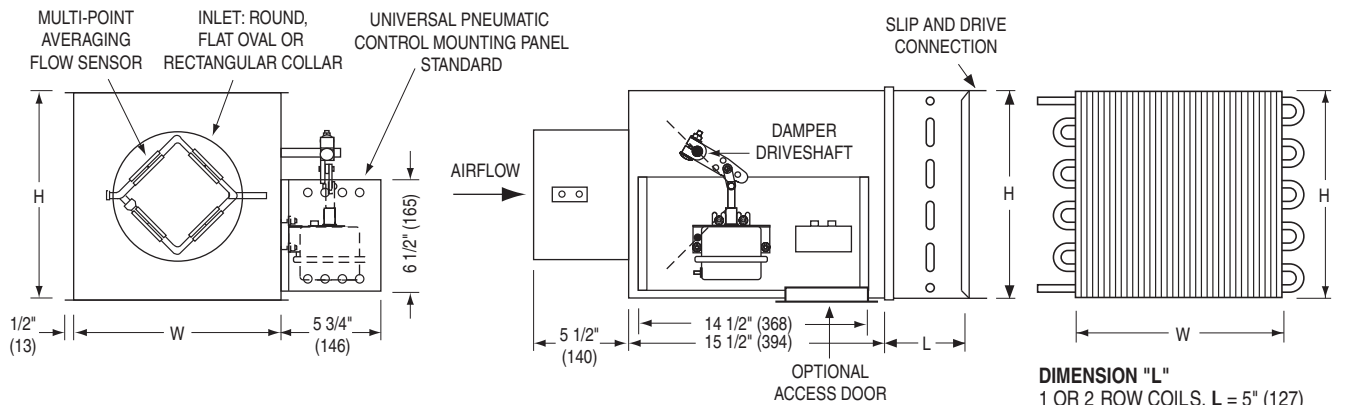

Dimensional Data

Unit Size	Airflow Range cfm (l/s)	W	H	Inlet Size	Coil Connections			
					1 Row	2 Row	3 Row	4 Row
4	0 – 180 (0 – 85)	10 (254)	10 (254)	3 7/8 (98) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
5	0 – 325 (0 – 153)	10 (254)	10 (254)	4 7/8 (124) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
6	0 – 450 (0 – 212)	10 (254)	10 (254)	5 7/8 (149) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
7	0 – 650 (0 – 307)	12 (305)	12 1/2 (318)	6 7/8 (175) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
8	0 – 900 (0 – 425)	12 (305)	12 1/2 (318)	7 7/8 (200) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
9	0 – 1150 (0 – 543)	14 (356)	12 1/2 (318)	8 7/8 (225) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
10	0 – 1500 (0 – 708)	14 (356)	12 1/2 (318)	9 7/8 (251) Round	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
12	0 – 2050 (0 – 967)	18 (457)	12 1/2 (318)	12 15/16 x 9 13/16 (329 x 249) Oval	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
14	0 – 2550 (0 – 1203)	24 (610)	12 1/2 (318)	16 7/16 x 9 13/16 (408 x 249) Oval	1/2 (13)	7/8 (22)	7/8 (22)	7/8 (22)
16	0 – 3040 (0 – 1435)	28 (711)	12 1/2 (318)	19 7/16 x 9 13/16 (487 x 249) Oval	7/8 (22)	7/8 (22)	7/8 (22)	7/8 (22)
24 x 16	0 – 6800 (0 – 3209)	38 (965)	18 (457)	23 7/8 x 15 7/8 (606 x 403) Rect.	7/8 (22)	7/8 (22)	1 3/8 (35)	1 3/8 (35)

Standard Features:

- 22 ga. (0.86) zinc coated steel casing, mechanically sealed, low leakage construction.
- 16 ga. (1.63) corrosion-resistant steel inclined opposed blade damper with extruded PVC seals (single blade on size 4, 5, 6). 45° rotation, CW to close. Tight close-off. Damper leakage is less than 2% of the terminal rated airflow at 3" w.g. (750 Pa).
- 1/2" (13) dia. plated steel drive shaft. An indicator mark on the end of the shaft shows damper position.
- Multi-point averaging Diamond Flow Sensor. Aluminum construction. Supplied with balancing tees.
- Rectangular discharge with slip and drive cleat duct connection.
- Universal control mounting panel with double wall stand-off construction.

- 3/4" (19), dual density insulation, exposed edges coated to prevent air erosion. Meets the requirements of NFPA 90A and UL 181.
- Right-hand controls location is standard (shown) when looking in direction of airflow. Optional left hand controls mounting is available.
- Hot Water Coil Section:**
 - 1/2" (13) Copper tubes and aluminum ripple fins, 10 per inch.
 - 1, 2, 3 or 4 row.
 - Left or right hand connection. Determined by looking in direction of airflow (RH illustrated).
 - 1/2" (13), 7/8" (22) or 1 3/8" (35) O.D. male solder sweat connections.



Controls:

- By Nailor. (See separate submittal).
- By others.


Options and Accessories:

- Steri-liner.
- Fiber-free liner.
- Solid metal liner.
- 1" (25) liner.
- Bottom access door.
- Hanger brackets.
- Protective controls shroud cover.
- Special Features:


SCHEDULE TYPE					
PROJECT					
ENGINEER		DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR		8 - 3 - 09	3000	12 - 1 - 08	P30RW-1

Integral Sound Attenuator plus Hot Water Coil

- Single continuous length terminal construction minimizes casing leakage.
- Continuous internal insulation reduces insulation seams and minimizes airflow disturbance.
- Supplied with same liner as basic unit.

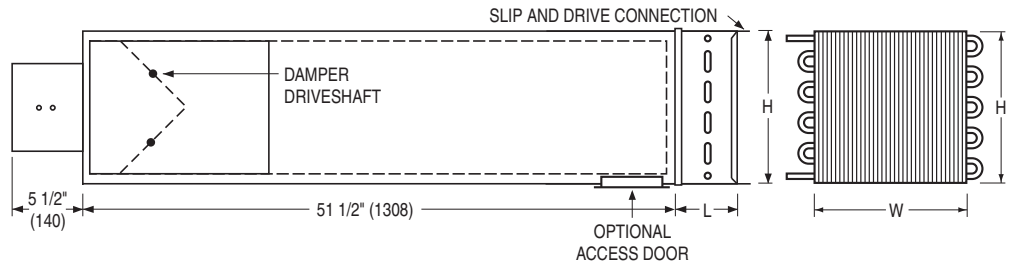


AT Discharge Sound Attenuator (loose)

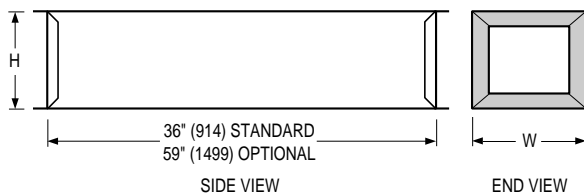

- Shipped loose for field attachment.
 - Slip and drive connection.
 - Supplied as standard with same liner as basic unit.
- AT303 Standard.
 AT305 Optional.
 Special Features: _____

FF Round Discharge Collar

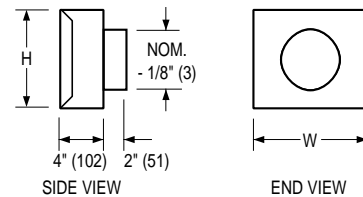

Dimensional Data

Unit Size	W	H	Hot Water Coil		FF Outlet Size
			L(1 & 2 row)	L (3 & 4 row)	
4, 5, 6	10 (254)	10 (254)	5 (127)	7 ½ (191)	4, 5, 6 (102, 127, 152)
7, 8	12 (305)	12 ½ (318)	5 (127)	7 ½ (191)	7, 8 (178, 203)
9, 10	14 (356)	12 ½ (318)	5 (127)	7 ½ (191)	9, 10 (229, 254)
12	18 (457)	12 ½ (318)	5 (127)	7 ½ (191)	12 (305)
14	24 (610)	12 ½ (318)	5 (127)	7 ½ (191)	14 (356)
16	28 (711)	12 ½ (318)	5 (127)	7 ½ (191)	16 (406)
24 x 16	38 (965)	18 (457)	5 (127)	7 ½ (191)	-

SCHEDULE TYPE				
PROJECT				
ENGINEER	DATE	B SERIES	SUPERSEDES	DRAWING NO.
CONTRACTOR	8 - 3 - 09	3000	12 - 1 - 08	P30RW-1