






STEEL RETURN GRILLES & REGISTERS
FIXED BLADES • 1/2" (13) CENTERS
MODELS: 6155H(-O) AND 6155V(-O) TYPE S

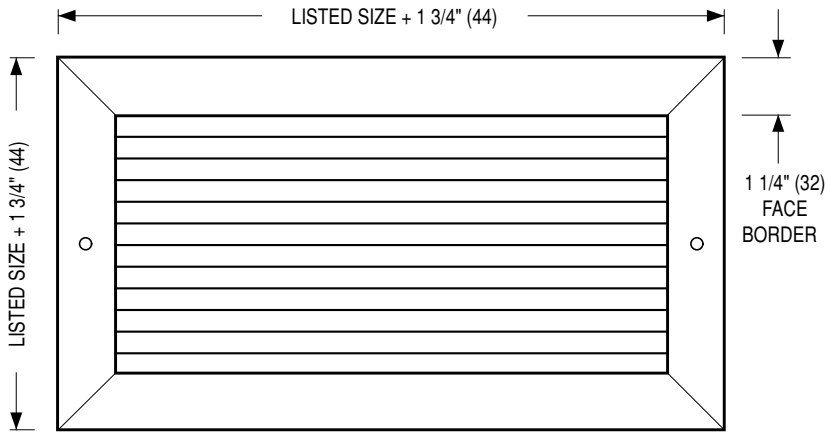

Model 6155H

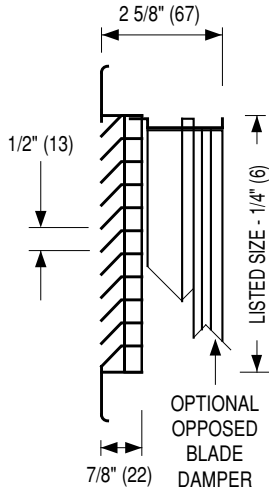

MODEL 6155H
Horizontal Blades

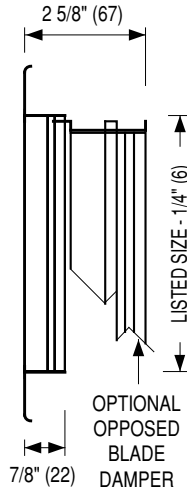

MODEL 6155V
Vertical Blades

MODEL 6155H
Single Deflection Grille
Fixed 45° Horizontal Blades

MODEL 6155H-O
Single Deflection Register
Fixed 45° Horizontal Blades
(Includes O. B. Damper)

MODEL 6155V
Single Deflection Grille
Fixed 45° Vertical Blades

MODEL 6155V-O
Single Deflection Register
Fixed 45° Vertical Blades
(Includes O. B. Damper)

DESCRIPTION:

1. Construction: Corrosion resistant steel. Roll-formed frame mechanically interlocked with reinforced mitered corners for strength. Streamlined shaped blades on 1/2" (13) centers are fixed at 45 degrees. Concealed reinforcing mullions on maximum 16" (406) centers. No see through when viewed from straight ahead.
2. Optional roll-formed steel opposed blade damper has a concealed lever operator.
3. Minimum size is 4" x 4" (102 x 102). Maximum size is 48" x 36" (1219 x 914).
4. Type S surface mount frame has a 1 1/4" (32) face border and a 1" (25) overlap margin.
5. Standard fastening is Type A countersunk screw holes.
6. Standard finish is AW Appliance White.

OPTIONS:

1. Finish:
 SP Special _____ .
2. Fastening:
 Type N None.
3. PF Plaster frame
4. IS Insect screen
5. Other _____ .

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
2 - 7 - 11	6100	6100-38/17-10-00	6100-8